



Recovery of Nickel (II) Ions from Electroplating Rinse Water Using Hectorite Clay

V.Ramamurthi (Corresponding author)

Department of Chemical Engineering, A.C. College of Technology

Anna University, Chennai- 600 025, India

E-mail: ramamur1951@yahoo.co.in & pgpriya78@yahoo.co.in

P. Gomathi Priya

Department of Chemical Engineering, A.C. College of Technology

Anna University, Chennai- 600 025, India

S.Saranya

Department of Chemical Engineering, A.C. College of Technology

Anna University, Chennai- 600 025, India

C.Ahmed Basha

Pollution Control Division, Central Electro Chemical Research Institute

Karaikudi-630 006, India

Abstract

This paper describes the recovery of Ni (II) from electroplating rinse water using the Hectorite clay. Batch mode adsorption experiments were carried out and the effect of contact time, adsorbent dosage, pH, initial metal ion concentration and temperature were studied. Different isotherms were obtained using nickel electroplating rinse waters of various concentrations. The ion exchange process follows second order kinetics and langmuir isotherm. The paper discusses thermodynamic parameters, including changes in Gibbs free energy, entropy and enthalpy for the ion-exchange of Ni (II) from electroplating rinse water on Hectorite clay, revealed that the ion-exchange process was spontaneous and exothermic under different temperatures. The maximum adsorption capacity obtained was 62.24 mg/g at pH 7-8, the optimum adsorbent dosage and contact time was found to be 2 g/l within 5 hours.

Keywords: Nickel, Hectorite, Rinse water, Adsorption and kinetics

1. Introduction

Heavy metal pollution occurs in many industrial wastewater such as those produced by metal-plating, finishing facilities, dyeing operations, mining and metallurgical engineering, electroplating, nuclear power plants, aerospace industries, battery manufacturing processes, the production of paints and pigments and glass production etc. The presence of heavy metals in the aquatic ecosystem has been of increasing concern because of their toxic properties and other adverse effects on natural waters quality, such as Ni, Cu, Zn, Cr, Cd and Pb. Elevated environmental levels of nickel ions derived from variety of sources. Nickel find its way to water bodies through waste water from metal plating industries, cadmium – nickel batteries and alloys. Exposure to nickel causes decrease in body weight, heart and liver damage and skin irritation. The higher concentration of Ni (II) in ingested water may cause severe damage to lungs, kidneys, gastrointestinal distress, e.g., nausea, vomiting, diarrhea, pulmonary fibrosis, renal edema, and skin dermatitis. It is also a known carcinogen (Axtell et al 2003). Various treatment technologies have been developed for the purification of water and waste water contaminated by heavy metals. The most commonly used methods for the removal of metal ions

from industrial effluents include: chemical precipitation, solvent extraction, reverse osmosis, ultra filtration, ion exchange and adsorption. Among those methods, adsorption has been an effective separation process for a wide variety of applications. Since activated carbon is expensive, an alternate inexpensive adsorbent able to drastically reduce the cost of adsorption system has always been searched. Naturally occurring clay minerals have been very effectively used as adsorbents for the removal of various pollutants from waste water and aqueous solutions. Clays are hydrous alumino silicates broadly defined as those minerals that make up the colloid fraction of soils, sediments, rocks and water. Clay structure is layered with interlayer space and the layers may be electrically neutral or charged. The high specific area, chemical and mechanical stability, variety of structural and surface properties, higher values of cation exchange capacities, etc make clays an excellent group of adsorbents. Presence of both Bronsted and Lewis acidity on clay surface further enhance their adsorption capacity. Clay minerals in soil play the role of a natural scavenger of pollutants from water through both ion exchange and adsorption mechanism. (Baskaralingam et al 2006)

Considering favourable characteristics, adsorption of metal ions and other substances on clays has received considerable attention. For example, illite has been shown to absorb Cd (II) and natural bentonite eliminates zinc from aqueous solution. Removal of Cr (III), Ni (II), Cu (II) and Cd (II) by natural and Na-exchanged bentonites is also reported. (Naseem et al 2001) reported that Pb (II) can be removed from aqueous/acidic solutions by using bentonite as an adsorbent. (Bektas et al 2004) reported the adsorption of lead ions from aqueous solutions by natural sepiolite. (Krishna et al 2006) reported the removal of Cu (II) from aqueous solution by using kaolinite, montmorillonite and their modified adsorbents.

Hectorite is a crystalline sheet structure composed of two layers of silica tetrahedrons and one central dioctahedral layer, which comes under smectite group. It is 2:1 smectite clay, is composed of units made of two silica tetrahedral sheets with a central Mg octahedral sheet. It has permanent negative charges that arise due to the isomorphous substitution of Li^+ for Mg^{2+} . The negative charge is counterbalanced by the presence of inorganic cations on the clay surface (Grim, 1968). The structure of hectorite clay was shown in Figure 1. In this present investigation the batch mode adsorption studies were carried out using hectorite clay

2. Materials and Methods

Nickel chloride hexahydrate, hydrochloric acid, dimethyl glyoxime and ammonia solution are obtained from Ranbaxy fine chemicals Ltd, New Delhi, India. Hectorite was obtained from Clay Mineral Society, CA, USA. **Chemical Formula:** $\text{Na}_{0.3}(\text{Mg},\text{Li})_3\text{Si}_4\text{O}_{10}(\text{OH})_2$ also the properties of hectorite clay was shown in table 1. The amount of nickel present in the solution is determined by using absorbance value noted from UV – Visible Spectrophotometer (HITACHI U 2000 Spectrophotometer).

2.1 Generation of nickel electroplating wastewater

The electrolytic cell is comprised of a set of electrodes viz. copper sheet cathode and nickel anode, placed in the acidic nickel laden solution. An electric current is applied across the electrodes and through the solution. In the acidic nickel bath solution (pH value is 4.8) the copper sheets of surface area $7.5 \times 5.0 \text{ cm}^2$ (of 2 mm thick) is the work piece and nickel metal sheet of surface area as $6.5 \times 5 \text{ cm}^2$ (of 5 mm thick) were used as cathode and anode respectively. The experiment was carried out at a fixed current density (0.024 A/cm^2). The cathode was pre-treated and pickling was done for three minutes to remove dust and rust on the surface. When current is passed through an electrolyte the positively charged metal ions are drawn to the negatively charged cathode where they deposit onto the surface. The electroplating was done in the acidic bath for 10 minutes. One liter distilled water containing tanks were kept to rinse the cathode after electroplating. The rinsing was done for 10 seconds in each tank. The rinse water collected in the first tank (spray rinse and drag out) was not taken for adsorption studies, as it will be used as to make solution for evaporation loss during plating. And the other rinse waters collected were containing heavy metal concentrations from 24.9 mg L^{-1} , 43.4 mg L^{-1} , and 60.8 mg L^{-1} were used for further experiments.

3. Adsorption Studies

Batch adsorption studies were carried out using hectorite clay. All the adsorption experiments were carried out with 50 ml of rinse water solution of required concentrations (24.9 , 43.4 and 60.8 mg L^{-1}) at solution pH in a thermo stated orbital shaker (NEOLAB, Mumbai) at a fixed shaking speed of 150 rpm. The experiments were carried out for various adsorbent dosages, different initial Ni (II) ions concentration, for various contact time, pH and temperature. pH was measured using a pH meter (Elico model LI 120, Hyderabad, India). For the studies on the effect of pH, it was varied from 2 to 12 in metal ion rinse solution concentration of 43.4 ppm and 60.8 ppm . The solution was adjusted to the desired value using 0.1N hydrochloric acid solution and 0.1N sodium hydroxide solution. Temperature studies were carried out for the range of 30°C to 40°C . From the initial and final concentration, percentage removal can be calculated by

$$\% \text{Removal} = \frac{(C_0 - C_f)}{C_0} \times 100 \quad (1)$$

Where, C_0 - initial concentration of nickel in mg L^{-1} ,

C_f - final concentration of nickel in mg L^{-1}

The data obtained in batch model kinetics were used to calculate the equilibrium metal uptake capacity. It was also calculated for adsorptive quantity of nickel by using the following expression:

$$q_e = \frac{V(C_0 - C_e)}{w} \quad (2)$$

Where q_e is the equilibrium metal ion uptake capacity in mg g^{-1} , V the sample volume in litre, C_0 the initial metal ion concentration in mg l^{-1} , C_e the equilibrium metal ion concentration in mg l^{-1} and w is the dry weight of adsorbent in grams.

4. Kinetics of Adsorption

The order of adsorbate - adsorbent interactions has been described by using various kinetic models. Traditionally, the well-known pseudo first-order model of Lagergren has found general use, but second-order kinetics has also been applied with success by various authors to describe the interactions (Krishna et al 2004).

When adsorption is preceded by diffusion through a boundary, the kinetics in most cases follow the pseudo first-order rate equation of Lagergren.

$$\frac{dq_t}{dt} = K_1 (q_e - q_t) \quad (3)$$

where q_t and q_e are the amount adsorbed at time t and at equilibrium, and K_1 is the rate constant of the pseudo first-order adsorption process. The integrated rate law, after applying the initial condition of $q_t = 0$ at $t = 0$, is

$$\log(q_e - q_t) = \log q_e - K_2 \frac{t}{2.303} \quad (4)$$

The plot of $\log (q_e - q_t)$ vs. t gives a straight line for first-order kinetics, which allows computation of the adsorption rate constant, k_1 . If the experimental results do not follow Eqs. (3) and (4), they differ in two important aspects: (i) $k_1 (q_e - q_t)$ does not represent the number of available sites, and (ii) $\log (q_e)$ is not equal to the intercept of the plot of $\log (q_e - q_t)$ against t . In such cases, the pseudo second-order kinetics (Ho et al 2002) given by

$$\frac{dq_t}{dt} = K_2 (q_e - q_t)^2 \quad (5)$$

Where K_2 is the second-order rate constant, and for the boundary conditions $t = 0$ to $t = t$ and $q_t = 0$ to $q_t = q_t$, the integrated form of the equation is

$$\frac{t}{q_t} = \frac{1}{K_2 q_e^2} + \frac{1}{q_e} t \quad (6)$$

The rate constant for intra-particle diffusion (k_{id}) is calculated by the following equation as (Weber and Morris, 1962)

$$q_t = k_{id} t^{1/2} \quad (7)$$

Where q_t is the amount of Ni (II) ions adsorbed (mg g^{-1}) at time t (min) and k_{id} ($\text{mg g}^{-1} \text{min}^{-1/2}$) is the rate constant for intra-particle diffusion. Values of k_{id} were calculated from the slopes of the linear plots of q_t versus $t^{1/2}$.

5. Isothermal Adsorption Studies

5.1 Langmuir isotherm

The Langmuir adsorption isotherm (Langmuir, 1916) was probably the most widely applied adsorption isotherm. A basic assumption of the Langmuir theory is that adsorption takes place at specific homogeneous sites within the adsorbent. The saturated monolayer isotherm can be represented as

$$q_e = \frac{q_{\max} k C_e}{1 + k C_e} \quad (8)$$

Where c_e is the equilibrium concentration (mg L^{-1}), q_e the amount of metal ion adsorbed (mg g^{-1}), q_{\max} for a complete monolayer (mg g^{-1}), where the constant related to adsorption capacity and b is the constant related to the affinity of the binding sites and energy of adsorption (L mg^{-1}).

5.2 Freundlich isotherm

This fairly satisfactory empirical isotherm can be used for non-ideal adsorption and is expressed by the following equation,

$$q_e = K_f C_e^{1/n} \quad (9)$$

where K_F and n are the Freundlich constants related to the adsorption capacity and adsorption intensity of the adsorbent respectively. The Freundlich model (Freundlich, 1906) is more widely used but provides no information on the monolayer adsorption capacity, in contrast to the Langmuir model.

5.3 Redlich-Peterson Model

$$q_e = \frac{K_{RP}C_e}{(1 + a_{RP}C_e^\beta)} \quad (10)$$

Another three parameter Equation (10) known as Redlich - Peterson model (Redlich, Peterson, 1959) where K_{RP} , a_{RP} and β are the Redlich Peterson parameters. The exponent β lies between 0 and 1. When $a_{RP} \rightarrow 0$ isotherm is linear and if $\beta \rightarrow 1$ the isotherm obeys Langmuir. Further when $a_{RP}C_e^\beta \gg 1$, the model reduces to Freundlich isotherm, The Langmuir–Freundlich model.

5.4 Sips model

This is essentially a Freundlich isotherm which approaches an adsorption maximum at high concentrations of adsorbate. An equation mathematically equivalent to the Sips Model (Nitta et al 1984) this equation can also be obtained by assuming that the surface is homogeneous, but that the adsorption is a cooperative process due to adsorbate–adsorbent interactions. The following relation represents this model:

$$q_e = \frac{K_s C_e^{\beta_s}}{1 + a_s C_e^{\beta_s}} \quad (11)$$

where K_s the sips model isotherm constant, a_s the sips model constant and β_s the sips model exponent. When $a_s \rightarrow 0$ isotherm is Freundlich and if $\beta \rightarrow 1$ the isotherm obeys Langmuir model. All the model parameters were evaluated using MATLAB software.

6. Thermodynamic studies

In environmental engineering practice, both energy and entropy factors must be considered in order to determine the spontaneous of the processes. The adsorption process of metal ions can be summarized by the following reversible process, which represents a heterogeneous equilibrium (Tahir et al 2003). The apparent distribution coefficient (K_d) of the adsorption is defined as

$$K_d = \frac{q_e}{C_e} \quad (12)$$

Where C_e the concentration of metal ion on the adsorbent at equilibrium (mg l^{-1}) and q_e is the equilibrium adsorption capacity (mg g^{-1}). The K_d value is used in the following equation to determine the Gibbs free energy of adsorption (ΔG^0)

$$\Delta G^0 = -RT \ln K_d \quad (13)$$

Van't Hoff equation is given by

$$\Delta G^0 = \Delta H^0 - T\Delta S^0 \quad (14)$$

$$\ln K_d = -\frac{\Delta H^0}{RT} - \frac{\Delta S^0}{R} \quad (15)$$

where ΔG^0 is standard free energy change (J), R the universal gas constant ($8.314 \text{ J mol}^{-1} \text{ K}^{-1}$) and T is the absolute temperature (K).

The enthalpy (ΔH^0) and entropy (ΔS^0) can be obtained from the slope and intercept of a Van't Hoff equation of $\ln K_d$ vs. $1/T$

7. Results and Discussion

7.1 Effect of Contact Time on Percentage Adsorption

The dependence of adsorption of Ni (II) using hectorite clay on contact time for various concentrations at a room temperature and solution pH is shown in Figure.2 The adsorption on hectorite clay increased with contact time and attained a maximum value at 5 h for both the solution. Further increase in contact time does not show a significant change in percentage removal (Grim, 1968). It is evident from the results that the contact time required to attain equilibrium is dependent on the initial concentration of heavy metals.

7.2 Effect of Adsorbent Dosage on Percentage Adsorption

To determine the necessary hectorite quantity required for the maximum removal of Ni (II) ions, the adsorbent dosage was increased from the range of 0.01 g to 0.5 g, the effect of hectorite dosage on percentage removal was studied. From Figure.3, it is observed that there is a sharp increase in percentage removal with adsorbent dose for Ni (II). It is apparent that the percentage removal of heavy metals increases rapidly with increase in the dose of the adsorbents due to the

greater availability of the exchangeable sites or surface area. (Selvaraj et al 1998). Hence the optimum adsorbent dosage was found to be 0.1g per 50ml of nickel bearing rinse water effluents.

7.3 Effect of Initial Ni (II) Ions Concentration on Percentage Adsorption

From Fig 4 it can be observed that the percentage removal decreases with the increase in initial heavy metal concentration. Initial metal ion concentration is varied from 24.9 ppm to 60.8 ppm of effluent solution. At lower concentration, the percentage removal is very high and it is lower at higher concentration. This is due to availability of same amount of adsorbent site for various amount of initial metal ion concentration. The maximum removal of 95% was attained at the initial concentration of 24.9ppm due to the other characteristics contents of the effluents may be low.

7.4 Effect of pH on percentage adsorption

pH is one of the most important parameter controlling uptake of heavy metals from wastewater and aqueous solutions. Figure. 5 shows the effect of pH on heavy metal removal efficiencies on hectorite. These studies were conducted at a constant initial metal ions concentration of 43.4 ppm, adsorbent dosage of 0.1g/l solution and agitation period of 5 h for all heavy metal ions at varying the pH (2 to 12) on hectorite. By increasing the pH above 10, the metal ion precipitations take place. The percentage adsorption increases with pH to attain a maximum at pH 7 and thereafter the percentage removal does not change significantly. These results are found in agreement with other studies performed with monmorillonite and bentonite. The mechanism that influences adsorption characteristics of hectorite can be given by dissolution, ion exchange/adsorption and precipitation. From the figure 5, the lowest Ni²⁺ sorption rates were at pH 2. This could be due to the increase in competition for adsorption sites by H⁺. The basic mechanism that governs the adsorption characteristics of hectorite at pH ranging between 6 to 9 is adsorption and ion exchange. At these pH levels exchangeable cations present at the exchangeable sites are exchanged with Ni²⁺ cation in the aqueous solutions (Viraraghavan et al 1994).

7.5 Effect of temperature on percentage adsorption

Fig.6 shows the experimental results obtained from a series of contact time studies for metal ions adsorption with an initial metal ion concentration of 43.4 ppm and 60.8 ppm at solution in which temperature was varied from 25 to 40 °C. The adsorption of metal ions has been found to increase with an increase in temperature from 25 to 40 °C. The increase in adsorption with temperature may be attributed to either increase in the number of active surface sites available for adsorption on the adsorbent or the desolation of the adsorbing species and the decrease in the thickness of the boundary layer surrounding the adsorbent with temperature, so that the mass transfer resistance of adsorbate in the boundary layer decreases. (Naseem et al 2005).

The values of ΔH° and ΔS° were calculated from the slope and intercept of the plot of $\log K_d$ against $1/T$. From these values Gibbs free energy can be calculated. It is evident from the table that values of ΔH° are positive, i.e., endothermic, which is quite contrary to the usual observation. One possible explanation of endothermicity of the enthalpy of adsorption is the well-known fact that ions like Ni (II) are well solvated in water. In order for metal ions to be adsorbed, they have to lose part of their hydration sheath. This dehydration process requires energy. This energy of dehydration supersedes the exothermicity of ions getting attached to the surface. The Gibbs free energy change (ΔG°) is negative as expected for a spontaneous process. The rise in ΔG° with rise in temperature shows that the reaction is more favourable at higher temperature.

7.6 The Pseudo First-Order Kinetics

It is well recognized that the characteristics of sorbent surface is a critical factor that affects the sorption rate parameters. To describe the changes in the sorption of ions studied with time, several kinetic models were tested. A plot of $\log (q_e - q_t)$ vs. time (figure 7) was drawn and the rate constant and q_e were calculated from the slope and intercept of the plot. (Runping Han et al 2005) The plots of $\log (q_e - q_t)$ Vs time were nearly linear with regression coefficients of 0.92-0.98. However the value of q_e calculated from equation does not match with experimental values shown in table.2. Hence the results were further tested for pseudo second-order kinetics.

7.7 The Pseudo Second-Order Kinetics

A plot of t/q_t Vs time (Figure 8) gives very good straight lines. Success with the second order kinetics suggests chemisorption as the rate – controlling step. Rate constant can be calculated from the slope and intercept of the plot and regression coefficients was found to be in the range of 0.99. Thus kinetics for adsorption of nickel on hectorite clay from electroplating effluents fits well to pseudo second-order equation. Table.3 shows the first, second order rate constants and the regression coefficients. It confirms that by increasing the initial metal ion concentration will decrease the second order rate constants.

7.8 Intra particle diffusion

Weber- Morris model was applied to the adsorption of Ni (II) on to hectorite as a function of rinse water concentration and the variation of q_t vs. $t^{1/2}$ was given in Figure 9 respectively. The linear portions of the curve do not pass through

the origin indicating that the mechanism of Ni(II) on hectoite was complex and both the surface adsorption as well as intra particle diffusion contributes to the actual adsorption process. The intra particle rate constants for initial rinse water concentrations for both the resins were obtained from the slope of the linear portions of the plots of qt vs. $t^{1/2}$ and the results were presented in table.2, which gives the values of k_{id} and model constants for the hectoite with respect to initial concentration.

7.9 Isothermal Studies

Duplicate runs for batch mode adsorption experiments were made for each adsorbent to determine the adsorption capacity. Many models have been used to explain adsorption equilibriums, but the most important factor is to have applicability over the entire range of process conditions. The most widely used two parameter adsorption models were Langmuir and Freundlich isotherms where Redlich-Peterson isotherm and sips model were known as three parameter model. The isotherm relate metal uptake per unit weight of adsorbent q_e to the equilibrium adsorbate concentration in the bulk fluid phase. The main reason for the extended use of these isotherm models is that they incorporate constants that are easily interpretable. The constants along with correlation coefficients obtained from these isotherm models are listed in Table 4. The Langmuir sorption model served to estimate the maximum metal uptake values, where they could not be reached in the experiments. The isotherm data were well fitted in all the isotherms. Figure [10-13] present the Langmuir, Freundlich, Redlich -Peterson isotherm and sips isotherm plots for nickel (II) ions adsorption on the hectorite clay using the electroplating effluents containing nickel solutions for different temperatures. Using the MATLAB software the graphs shows the high value of coefficient of correlation, for the adsorbent indicates the models fit well. The application of the Langmuir, Freundlich, Redlich-peterson model and sips isotherm data resulted in better R^2 correlation coefficients ($R^2 = 0.9$) indicates good agreement between experimental and predicted data. Also it clears that the hectorite clay is more effective for heavy metals removal.

8. Conclusion

Thus the adsorption experiments were carried out using hectorite clay for nickel electroplating effluents. The effects of various parameters like contact time, adsorbent dosage, pH, initial metal ion concentration and temperature on the adsorption of nickel from electroplating rinse effluent were studied. The maximum removal of Nickel (II) was found to be 95% for electroplating rinse water at initial concentration of 24.9 mg/l. Equilibrium time was found to be 5 hrs for adsorption from electroplating rinse effluent after which no effective removal was found. The effective adsorbent dosage was found to be 0.1 g per 50 ml of solution for nickel bearing industrial effluents. Optimum pH was found to be in the range of 7 – 8, at which maximum removal of nickel was observed. Effect of temperature was found to be significant as the rate of adsorption increases as the temperature increases. Thermodynamic parameters like ΔH° , ΔS° and ΔG° were calculated. ΔH° values were found to be positive and hence the adsorption process is endothermic. ΔG° values were found to be negative which confirms the spontaneous process. Kinetic studies were done and pseudo second-order equation was found to be fitted well when compared to pseudo first-order equation. Experimental values were fitted with various isotherms for different temperature range (303-313K) and all the isotherms were found using MATLAB software fit well. Maximum adsorption capacity was found to be 62.24 mg/g for adsorption from nickel electroplating effluent.

References

- Axtell, N.R., Sternberg, S.P.K., & Claussen, K. (2003). Lead and Ni (II) removal using *Microspora* and *Lemna minor*. *Bioresour Technol.*, 89, 41- 48.
- Baskaralingam,P., Pulikesi, M., Ramamurthi,V., and Sivanesan,.S. (2006). Equilibrium studies for the adsorption of acid dye onto modified hectorite. *Journal of Hazardous Materials*, B136 989-992.
- Bektas,N., Agim,B.A., Kara,S. (2004). Kinetic and equilibrium studies in removing lead ions from aqueous solutions by natural sepiolite. *Journal of Hazardous materials*, 112, 115-122.
- Freundlich, H. (1906). Uber die adsorption in losungen *Z. Phys. Chem*, 57, 385–470.
- Grim.R.E. (1968).*Clay Mineralogy*, Frank Press, London, 86.
- Ho,Y.S., McKay,G. (2002). Application of kinetic models to the sorption of Copper (II) on peat. *Adsorption Science Technology* 207, 97-815.
- Krishna, G., Bhattacharyya., Arunima Sharma. (2004). Azadirachta indica leaf powder as an effective biosorbent for dyes: a case study with Congo red solutions. *Journal of Environmental Management*, 71, 217-229.
- Krishna, G., Bhattacharyya., Sushmita Sen Gupta. (2006). Kaolinite-montmorillonite and their modified derivatives as adsorbents for removal of Cu (II) from aqueous solution. *Separation and purification Technology*, 50, 388-397.
- Langmuir, I. (1916). The constitution and fundamental properties of solids and liquids, *Journal of the American Chemical Society*, 38, 2221-2295.

- Naseem, R., Tahir,S.S. (2005). Removal of a Vanadium (IV) from aqueous solutios by adsorption process with Aluminium – Pillared Bentonite. *Indian Engineering Chemical Resources*, 44, 6667 – 6684.
- Naseem,R., Tahir,S.S. (2001). Removal of Pb (II) from aqueous acidic solutions by using bentonite as an adsorbent. *Water Resources*, 16, 3982 – 3986.
- Nitta, T., Shigetomi, T., Kuro-Oka, M., and Katayama, T. (1984). An adsorption isotherm of multi-site occupancy model for homogeneous surface. *J. Chem. Engg,Japan* 17, 39-52.
- Redlich, O., Peterson, D.L. (1959). A useful adsorption isotherm. *Journal of Physical Chemistry*, 63, 1024.
- Runping Han., Jinghua Zhang., Weihua Zou., Jie Shi., Hongmin Liu. (2005). Equilibrium biosorption isotherm for lead ion on chaff, *Journal of Hazardous materials*, B125, 266-271.
- Selvaraj,K., Chandramohan,V., Pattabhi,S. (1998). Removal of Cr (VI) from solution and chromium plating industry waste water using photofilm waste sludge. *Indian Journal of Environmental Health* 18, 641-646.
- Tahir,S.S., Naseem Rauf. (2003). Thermodynamics studies of Nickel (II) adsorptions onto bentonite from aqueous solution. *Journal of Chemical Thermodynamics*, 35, 2003-2009.
- Viraraghavan.T., Kapoor.A. (1994). Adsorption of mercury from wastewater by bentonite. *Applied clay science*, 9, 31 – 49.
- Weber, W.J., and Morris, C.J. (1962). Advances in water pollution research in proceedings of the first International Conference on Water Pollution Research, vol. 2, Pergamon Press, Oxford, 231.

Table 1. Properties of Hectorite

| Constituents | Percentage (%) |
|---|--|
| SiO ₂ | 62.71 |
| MgO | 28.39 |
| Li ₂ O | 1.17 |
| Na ₂ O | 3.23 |
| H ₂ O | 4.70 |
| Na | 2.40 |
| Mg | 17.12 |
| Si | 29.31 |
| H | 0.53 |
| O | 50.10 |
| Li | 0.54 |
| Specific surface area (N ₂ area) | 63.19(m ² g ⁻¹) |
| Molecular Weight | 383.25 gm |
| Cation exchange capacity | 43.9 mEq/100 g |

Table 2. Thermodynamic parameters for the removal of Ni(II) from electroplating rinse effluents

| Initial Ni (II) concentration mg/l | ΔH° kJ.mol ⁻¹ | ΔS° kJ.mol ⁻¹ | ΔG° (kJ.K ⁻¹ mol ⁻¹) | | | |
|---------------------------------------|--|--|--|---------|---------|---------|
| | | | T=298 K | T=303 K | T=308 K | T =313K |
| 43.4 | 125.59 | 0.424 | -0.762 | -2.883 | -5.002 | |
| 60.8 | 86.02 | 0.297 | -7.122 | -3.889 | -5.374 | |
| | | | -2.404 | | | |
| | | | -6.859 | | | |

Table 3. Kinetic parameters for pseudo first-order, pseudo second order and intra particle diffusion equation for the removal of Ni (II) from electroplating rinse effluents

| Initial concentration of Ni(II) mg/l | Pseudo first-order | | | Pseudo second order | | | Intra particle diffusion | |
|---|---|--|----------------|--|--|----------------|--|----------------|
| | Lagergren rate constant, K ₁ (min ⁻¹). | q _e (mg g ⁻¹) | R ² | Rate constant K ₂ (g mg ⁻¹ min ⁻¹) | q _e (mg g ⁻¹) | R ² | Kid (mg g ⁻¹ min ^{1/2}) | R ² |
| 24.9 | 0.0066 | 2.038 | 0.9621 | 0.0137 | 11.28 | 0.9945 | 0.4413 | 0.9434 |
| 43.4 | 0.004 | 2.513 | 0.9865 | 0.0038 | 18.58 | 0.9804 | 0.6735 | 0.9913 |
| 60.8 | 0.0103 | 3.189 | 0.9655 | 0.0023 | 19.34 | 0.9979 | 0.7535 | 0.9154 |

Table 4. Adsorption Isotherm Constants for the removal of Ni(II) from electroplating rinse effluents

| Temperature (K) | | 303 K | 308K | 313K |
|----------------------------|--|-------|-------|--------|
| Langmuir isotherm | q _{max} (mg g ⁻¹) | 18.7 | 22.64 | 62.24 |
| | b (g ⁻¹) | 0.349 | 0.608 | 0.4121 |
| | R ² | 0.971 | 0.978 | 0.93 |
| Freundlich isotherm | K _f | 5.32 | 8.827 | 17.01 |
| | n | 0.377 | 0.324 | 0.5615 |
| | R ² | 0.983 | 0.976 | 0.962 |
| Redlich -Peterson isotherm | K _{RP} | 5.87 | 12.43 | 8.23 |
| | a _{RP} | 0.137 | 0.442 | -0.5 |
| | β | 0.5 | 0.688 | 0.255 |
| | R ² | 0.985 | 0.985 | 0.926 |
| Sips isotherm | K _s | 5.87 | 12.43 | 8.23 |
| | a | 0.137 | 0.442 | -0.5 |
| | b | 0.5 | 0.688 | 0.255 |
| | R ² | 0.985 | 0.985 | 0.926 |

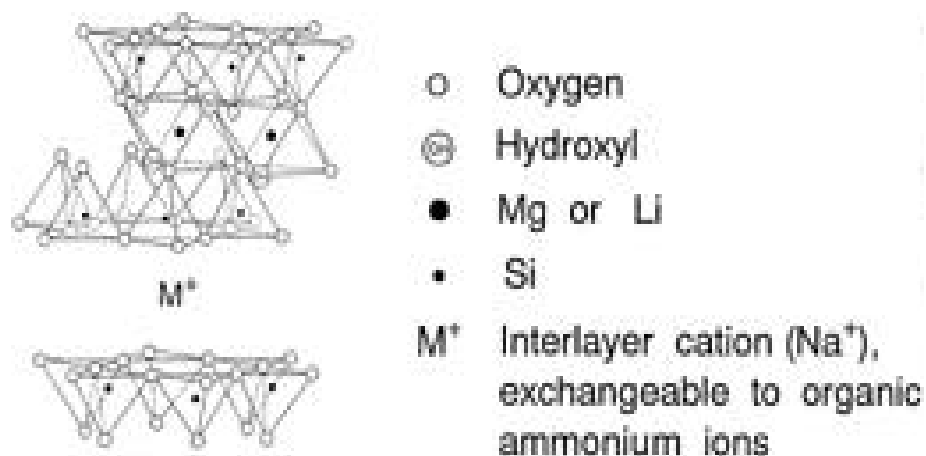


Figure 1. STRUCTURE OF HECTORITE

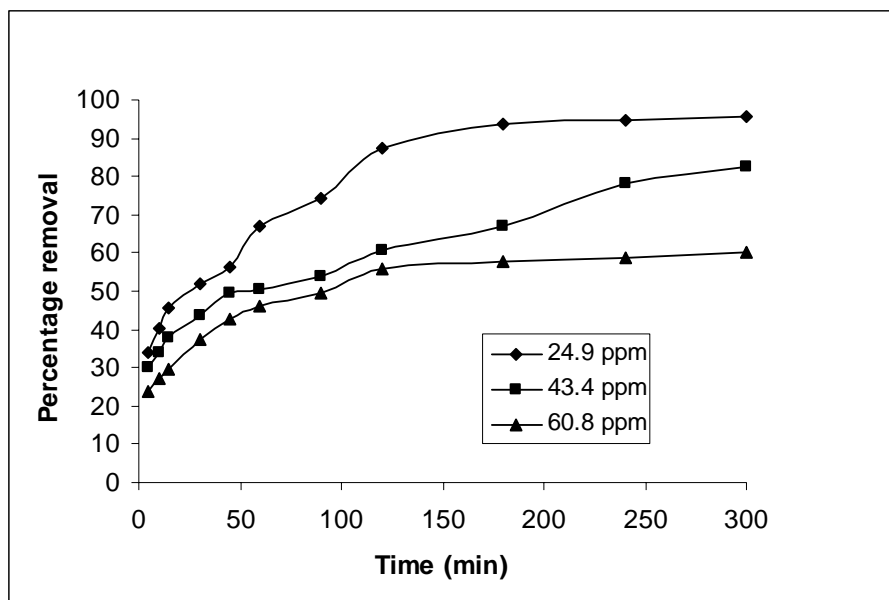


Figure 2. Effect of contact time on percentage removal of Ni (II) from electroplating effluent

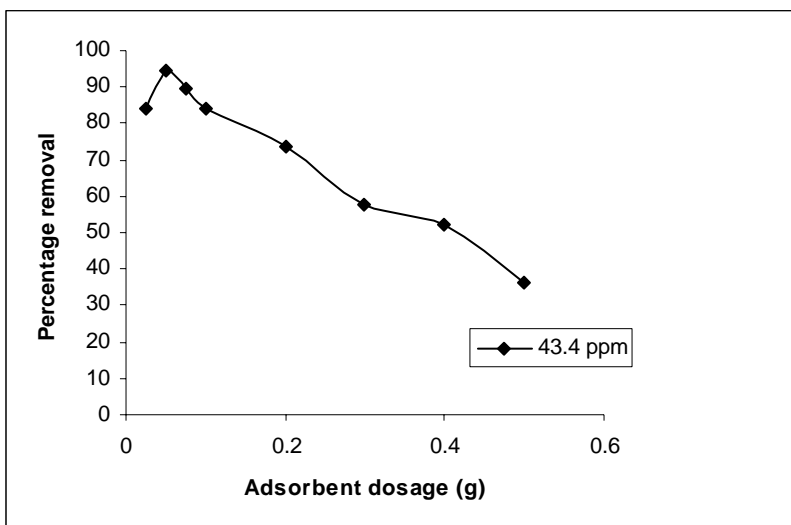


Figure 3. Effect of adsorbent dosage on percentage removal of Ni (II) from electroplating effluent

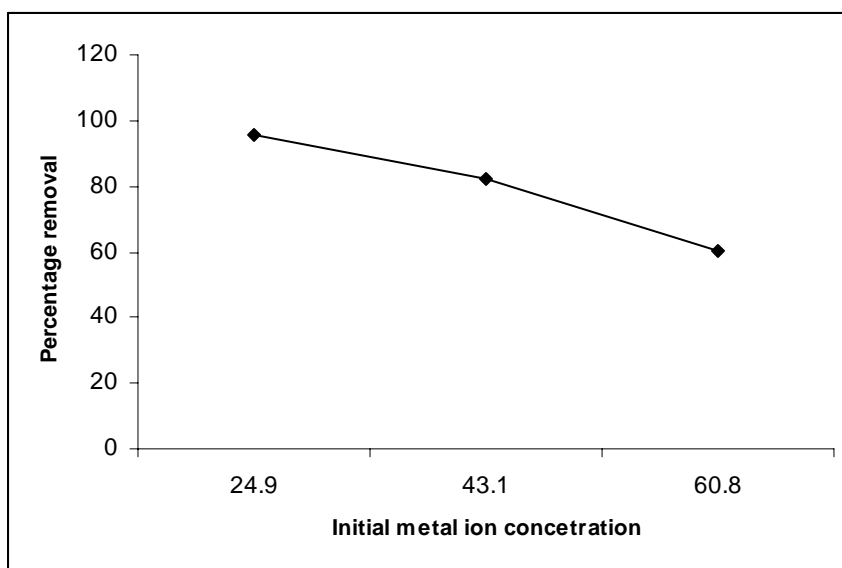


Figure 4. Effect of initial metal ion on percentage removal of Ni (II) from electroplating effluent

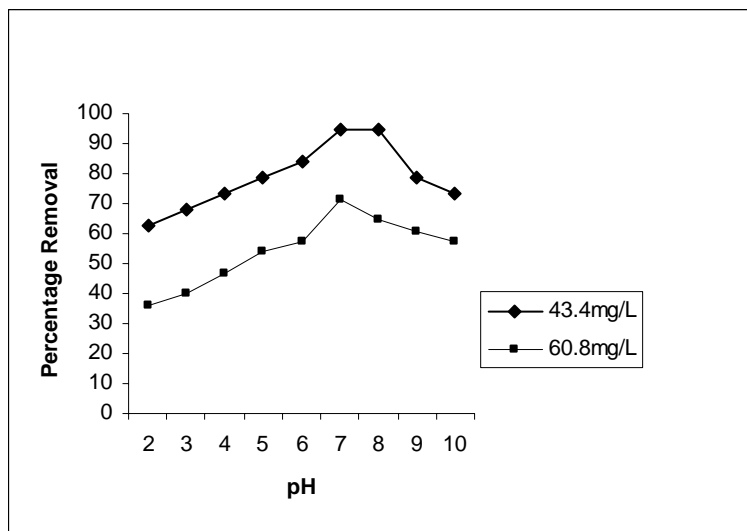


Figure 5. Effect of pH on percentage removal of Ni (II) from electroplating effluent

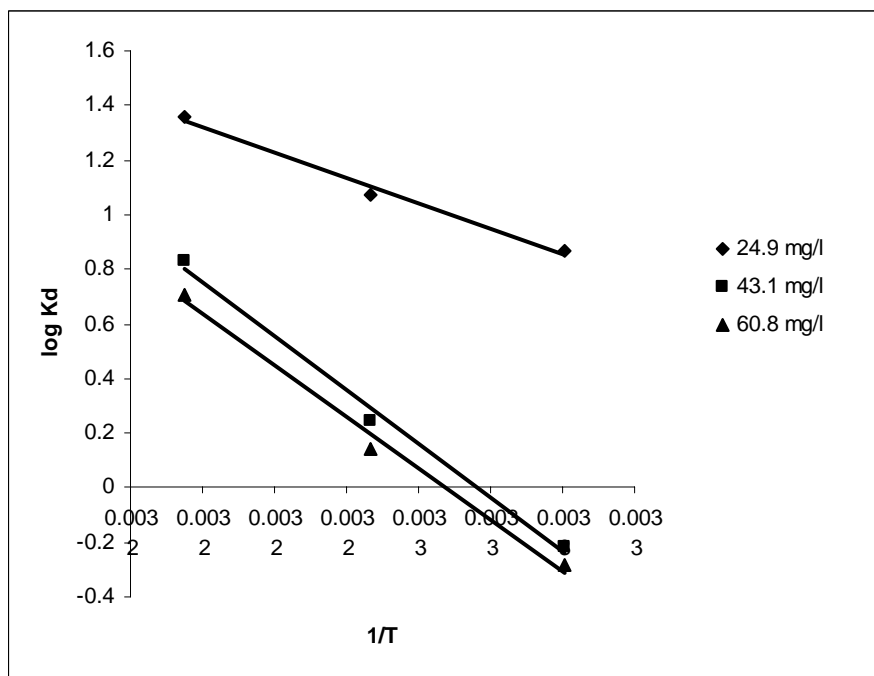


Figure 6. Effect of temperature on percentage removal for the removal of Ni (II) from electroplating effluent

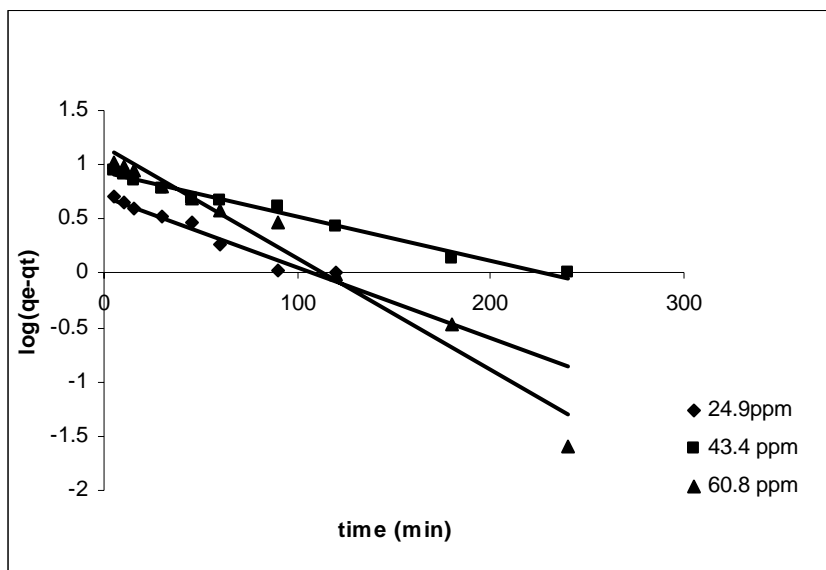


Figure 7. Pseudo – first – order for adsorption of Ni (II) from electroplating effluent

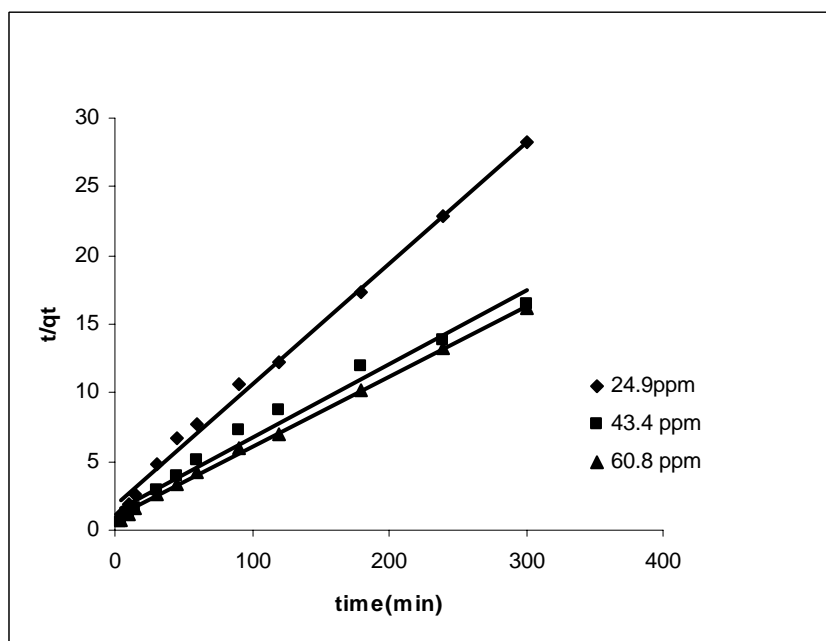


Figure 8. Pseudo – Second– order for adsorption of Ni (II) from electroplating effluent

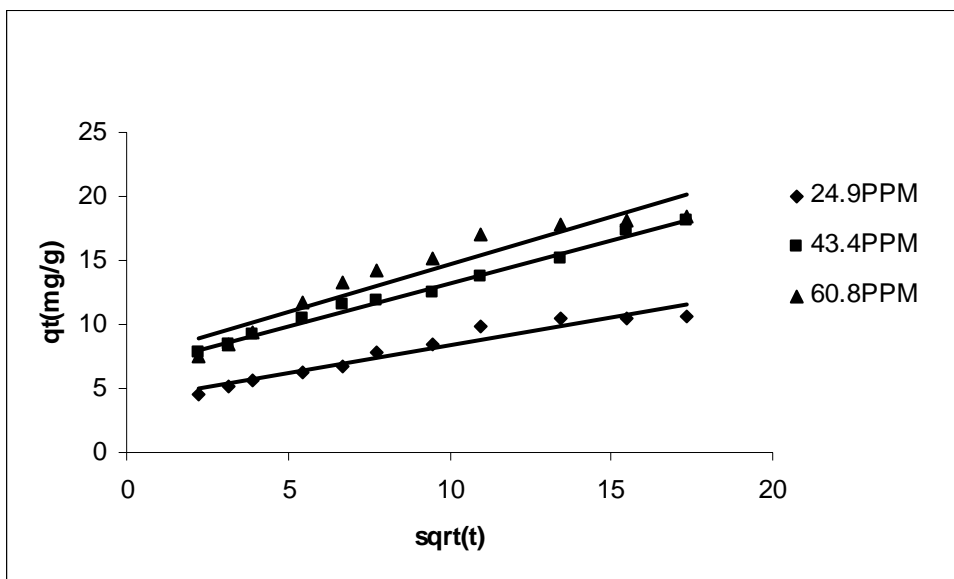


Figure 9. The Intra particle diffusion model for adsorption of Ni (II) from electroplating effluent

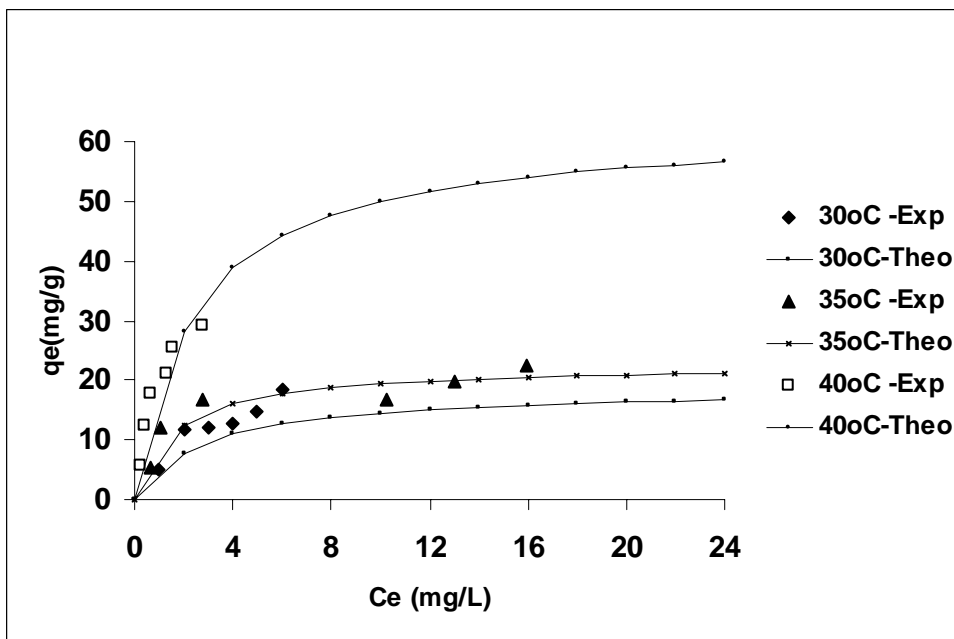


Figure 10. Langmuir plot for adsorption of Ni (II) from electroplating effluent

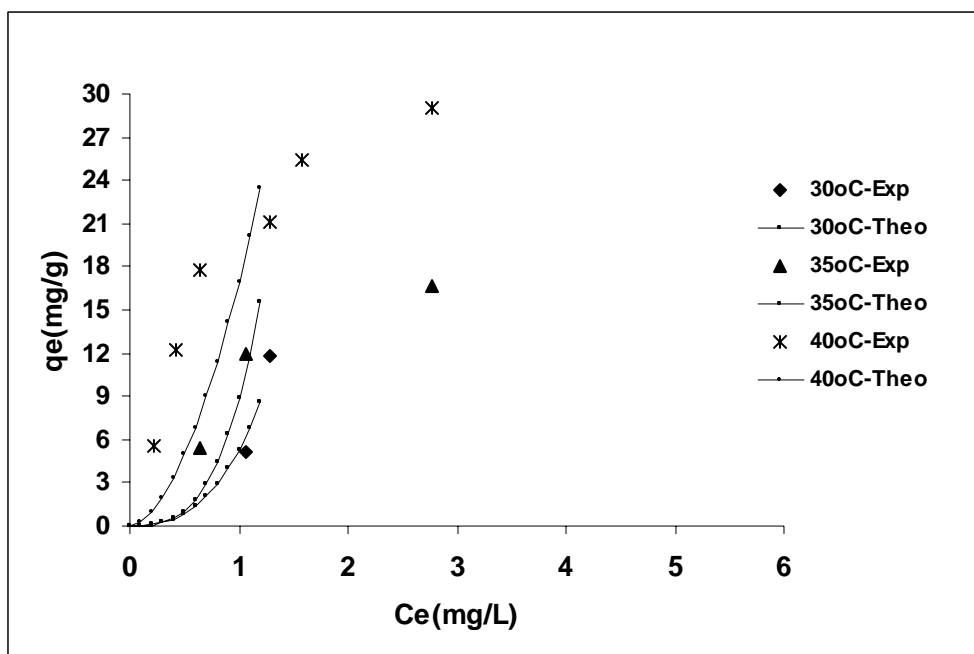


Figure 11. Freundlich isotherm for adsorption of Ni (II) from electroplating effluent

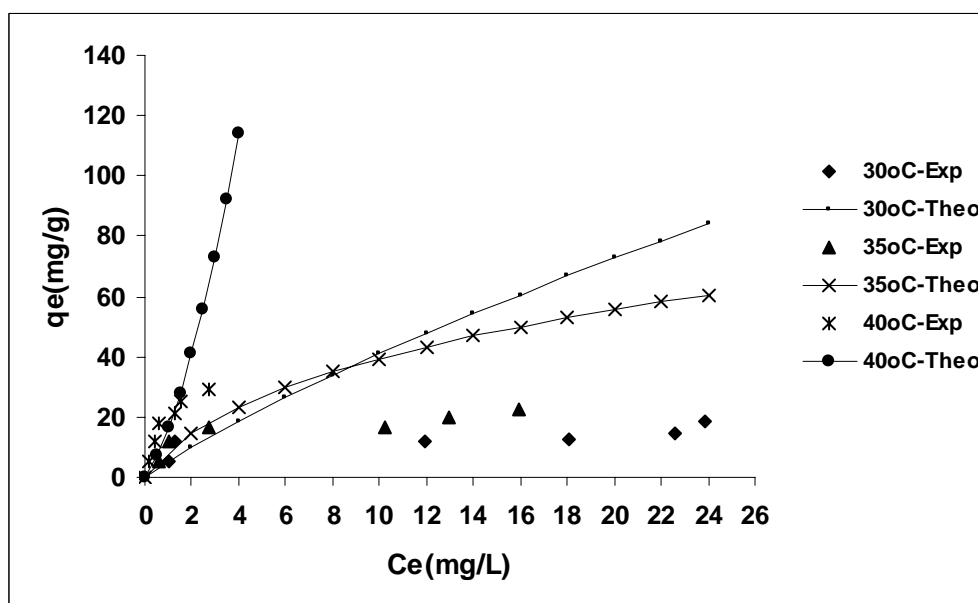


Figure 12. Redlich-Peterson isotherm for adsorption of Ni (II) from electroplating effluent

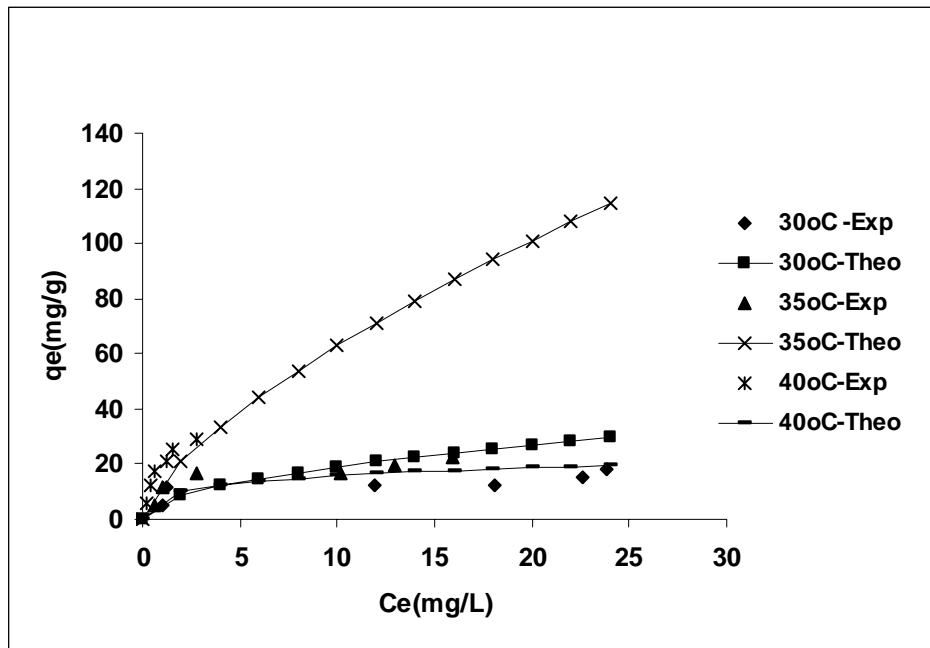


Figure 13. Sips isotherm for adsorption of Ni (II) from electroplating effluent